













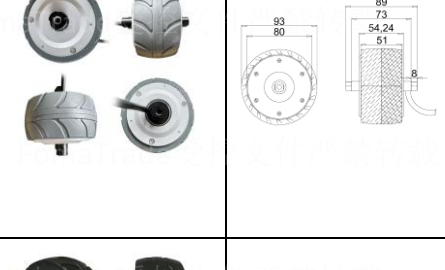

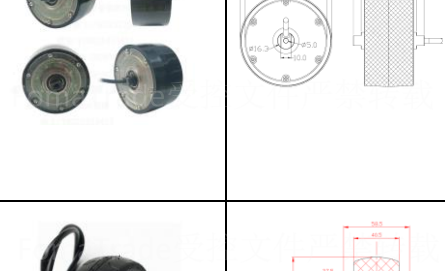
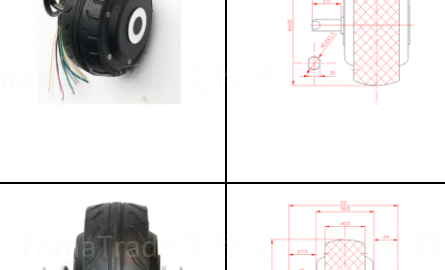
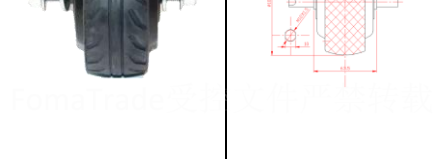
















深圳市金海芯控股有限公司















Shenzhen Jinhaixin Holdings Co., Ltd

Winamics Product Models for: Entertainment/Outdoor/Transportation/Medical/Hotel/Logistics/Robotics/Rail/Agriculture, etc















No.	Specifications/models/serial numbers										Physical pictures	Size details	Detailed parameters	Project name	Reference Price #CNY		
0	3-inch diameter 70mm tire width 55 center hole through shaft PU black tire model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1200 RPM Maximum speed: 1500 RPM Maximum torque: 2.5 N/m Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1:1 Maximum load: 50 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	26	01	3T0	070	042	0406	3025	24	D4	0301						Spot retail Leftover stock	\$330.00
	Series number		26013T00700420406302524D40301													Small Batch MOQ 200	\$214.50
	Application scenarios		Electric skateboard, sand belt machine, assisted bicycle, robot trolley													Normal Order MOQ 1K	\$165.00
5	3-inch diameter 70mm, tire width 40, opening gear 48, bilateral threaded shaft arc model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 150 W Maximum power: 200 W Rated speed: 5000 RPM Maximum speed: 10000 RPM Maximum torque: 1.5 N/m Sensor: AHLL120° Pole pairs: 7 pairs Reduction ratio: 1:1 Maximum load: 30 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	26	01	3T0	070	040	0604	3025	24	D4	0302						Spot retail Leftover stock	\$310.00
	Series number		26013T00700400604302524D40302													Small Batch MOQ 200	\$201.50
	Application scenarios		Ball machine, detection trolley, assist bicycle													Normal Order MOQ 1K	\$155.00
10	3-inch diameter 70mm tire width 55 center hole through shaft PU yellow tire model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1500 RPM Maximum speed: 1800 RPM Maximum torque: 2.5 N/m Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1:1 Maximum load: 50 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	26	01	3T0	070	042	0406	3025	24	D4	0303						Spot retail Leftover stock	\$330.00
	Series number		26013T00700420406302524D40303													Small Batch MOQ 200	\$214.50
	Application scenarios		Electric skateboard, sand belt machine, assisted bicycle, robot trolley													Normal Order MOQ 1K	\$165.00
15	3-inch diameter 60mm tire width 55 center hole shaft quick release model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1500 RPM Maximum speed: 2000 RPM Maximum torque: 2.5 N/m Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1:1 Maximum load: 50 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	26	01	3T0	070	040	0406	3025	24	D4	0305						Spot retail Leftover stock	\$310.00
	Series number		26013T0070040060302524D40305													Small Batch MOQ 200	\$201.50
	Application scenarios		Skateboard, sand belt machine, assisted bicycle, robot trolley													Normal Order MOQ 1K	\$155.00
20	3-inch half-diameter 83mm tire width 57 center hole through shaft PU vinyl model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1000 RPM Maximum speed: 1500 RPM Maximum torque: 3.5 N/m Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1:1 Maximum load: 60 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	24	03	3T5	083	040	0406	3030	24	D4	0351						Spot retail Leftover stock	\$370.00
	Series number		24033T50830400406303024D40351													Small Batch MOQ 200	\$240.50
	Application scenarios		Skateboard, sand belt machine, assisted bicycle, robot trolley													Normal Order MOQ 1K	\$185.00
25	3-inch and a half diameter 90mm tire width 86 opening gear 94 bilateral finale												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1000 RPM Maximum speed: 1500 RPM Maximum torque: 4.5 N/m Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1:1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: IP55 product weight;	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number						Out of stock As-is production	\$4,999.00
	26	01	3T5	090	040	0406	3530	24	S4	0352						Spot retail Leftover stock	\$460.00
	Series number		26013T50900400406353024S40352													Small Batch MOQ 200	\$299.00
	Application scenarios		Skateboards, sand belt machines, robot trolleys, logistics tracks													Normal Order MOQ 1K	\$230.00















30	3 inch and a half diameter 90mm tire width 57 center hole through shaft PU yellow rubber model											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 1000 RPM Maximum speed: 1500 RPM Maximum torque: 3.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 60 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	3H5	090	040	0406	3030	24	D4	0353			Spot retail Leftover stock	\$430.00
	Series number		26013H50900400406303024D40353										Small Batch MOQ 200	\$279.50
Application scenarios		Skateboards, sand belt machines, robot trolleys								Normal Order MOQ 1K	\$215.00			
35	3 inch and a half diameter 90mm tire width 48 open gear 65 bilateral threaded shaft											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 130 W Maximum power: 180 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 3 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	3D5	090	040	0410	2020	24	S2	0354			Spot retail Leftover stock	\$192.00
	Series number		26013D50900400410202024S20354										Small Batch MOQ 200	\$124.80
Application scenarios		Skateboard, robot trolley, logistics track, luggage								Normal Order MOQ 1K	\$96.00			
40	3 inch and a half diameter 93mm tire width 54 open gear 73 bilateral female thread shaft (cycling suitcase off-white model)											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 150 W Maximum power: 200 W Rated speed: 600 RPM Maximum speed: 800 RPM Maximum torque: 4.3 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	3H5	093	050	0410	3025	24	T2	0356			Spot retail Leftover stock	\$230.00
	Series number		26013H50930500410302524T20356										Small Batch MOQ 200	\$149.50
Application scenarios		Skateboard, robot trolley, logistics track, luggage								Normal Order MOQ 1K	\$115.00			
45	3 inch half diameter 93mm tire width 54 open gear 73 bilateral female thread axle (black model for cycling luggage)											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 150 W Maximum power: 200 W Rated speed: 600 RPM Maximum speed: 800 RPM Maximum torque: 4.3 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	25	46	3H5	093	050	0410	3025	24	T2	0357			Spot retail Leftover stock	\$220.00
	Series number		25463H50930500410302524T20357										Small Batch MOQ 200	\$143.00
Application scenarios		Skateboard, robot trolley, logistics track, luggage								Normal Order MOQ 1K	\$110.00			
50	3 inch and a half diameter 92mm tire width 49 opening gear 55 bilateral female thread shaft PU model											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 100 W Maximum power: 150 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 3.1 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 60 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	3T5	092	058	0407	2020	24	T1	0358			Spot retail Leftover stock	\$170.00
	Series number		26013T50920580407202024T10358										Small Batch MOQ 200	\$110.50
Application scenarios		Children's skateboard, robot trolley, logistics track, luggage								Normal Order MOQ 1K	\$85.00			
55	4-inch diameter 105mm tire width 40 single-sided threaded shaft regular model											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 800 RPM Maximum torque: 4.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	4D0	105	050	0506	2530	24	D1	0401			Spot retail Leftover stock	\$350.00
	Series number		26014D01050500506253024D10401										Small Batch MOQ 200	\$227.50
Application scenarios		Skateboard, robot trolley, logistics track, luggage,								Normal Order MOQ 1K	\$175.00			
60	4 inch diameter 105mm tire width 40 opening 62 bilateral threaded shaft regular model											<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 800 RPM Maximum torque: 4.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			Out of stock As-is production	\$4,999.00
	26	01	4D0	105	060	0505	2530	24	S1	0402			Spot retail Leftover stock	\$350.00
	Series number		26014D01050600505253024S10402										Small Batch MOQ 200	\$227.50
Application scenarios		Bumper cars, skateboards, robot trolleys, logistics tracks, luggage boxes.								Normal Order MOQ 1K	\$175.00			















65	4-inch diameter 105mm tire width 42 single-sided threaded shaft PU flat tire model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 800 RPM Maximum torque: 5.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$390.00 \$253.50 \$195.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	050	0505	3025	36	D1	0403				
	Series number		26014T01050500505302536D10403											
Application scenarios		Robot chassis, logistics railcars,												
70	4-inch diameter 105mm tire width 42 opening 62 bilateral threaded shaft PU flat tire model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 800 RPM Maximum torque: 5.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$390.00 \$253.50 \$195.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	060	0505	3025	36	S1	0404				
	Series number		26014T01050600505302536S10404											
Application scenarios		Skateboard, robot trolley, logistics track, luggage,												
75	4-inch diameter 105mm tire width 42 single-sided threaded shaft PU water guide channel										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 500 RPM Maximum speed: 3000 RPM Maximum torque: 5.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$360.00 \$234.00 \$180.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	060	0704	3025	36	D1	0405				
	Series number		26014T01050600704302536D10405											
Application scenarios		AGV robot, logistics track,												
80	4 inch diameter 105mm tire width 42 open gear 62 bilateral threaded shaft PU water guide channel										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 2000 RPM Maximum speed: 3000 RPM Maximum torque: 5.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$15,000.00 \$4,999.00 \$350.00 \$227.50 \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	060	0704	3030	36	S1	0406				
	Series number		26014T01050600704303036S10406											
Application scenarios		Ball machine. Skateboard, robot trolley, logistics track, luggage,												
85	4-inch diameter 105mm tire width 60 opening gear 76 bilateral threaded shaft coated high-speed model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 180 W Maximum power: 250 W Rated speed: 2000 RPM Maximum speed: 3000 RPM Maximum torque: 3.5 N/M Sensor: AHLL120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$330.00 \$214.50 \$165.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	50	0704	3030	36	S1	0407				
	Series number		26014T01055007043036S10407											
Application scenarios		Ball machine. Inspection trolley												
90	4-inch diameter 105mm tire width 60 opening gear 76 bilateral threaded shaft coated high-speed model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 6000 RPM Maximum speed: 10000 RPM Maximum torque: 3.5 N/M Sensor: AHLL120° Pole pairs: 7 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$470.00 \$305.50 \$235.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	25	40	4T0	105	052	0704	3030	36	S1	0408				
	Series number		25404T01050520704303036S10408											
Application scenarios		Ball machine												
95	4-inch diameter 105mm tire width 55 open gear 62 bilateral thread shaft coated high-speed model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 2000 RPM Maximum speed: 3000 RPM Maximum torque: 4.5 N/M Sensor: None Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom None-spot As-is production Spot retail Leftover stock Small Batch MOQ 200 Normal Order MOQ 1K</p>	<p>\$35,000.00 \$4,999.00 \$350.00 \$227.50 \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				
	26	01	4T0	105	067	0704	3030	24	S1	0409				
	Series number		26014T01050670704303024S10409											
Application scenarios		Ball machine												















100	4-inch half-diameter 115mm tire width 39 single-sided threaded shaft regular model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 700 RPM Maximum torque: 5.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$460.00 Small Batch MOQ 200 \$299.00 Normal Order MOQ 1K \$230.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4D5	115	067	0406	3030	24	D1	0451			
	Series number		26014D511506704063024D10451										
Application scenarios		AGV robot, logistics track,											
105	4 inch and a half diameter 115mm tire width 39 opening gear 68 bilateral threaded shaft regular model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 700 RPM Maximum torque: 5.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$440.00 Small Batch MOQ 200 \$286.00 Normal Order MOQ 1K \$220.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4D5	115	067	0406	3025	24	S1	0452			
	Series number		26014D511506704063025S10452										
Application scenarios		Skateboard, AGV robot, logistics track, luggage,											
110	4 inch and a half diameter 115mm tire width 42 single-sided threaded shaft PU flat tire model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 700 RPM Maximum torque: 5.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$530.00 Small Batch MOQ 200 \$344.50 Normal Order MOQ 1K \$265.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4T5	115	067	0704	3030	36	D1	0453			
	Series number		26014T51150670704303036D10453										
Application scenarios		Robot trolley, logistics track,											
115	4-inch diameter 105mm tire width 42 opening 62 bilateral threaded shaft PU flat tire model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 700 RPM Maximum torque: 5.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$490.00 Small Batch MOQ 200 \$318.50 Normal Order MOQ 1K \$245.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4T0	105	067	0704	3030	36	S1	0404			
	Series number		26014T01050670704303036S10404										
Application scenarios		Skateboard, robot trolley, logistics track, ball machine,											
120	4 inch and a half diameter 115mm tire width 42 single-sided threaded shaft PU water guide channel										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 900 RPM Maximum torque: 6.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$460.00 Small Batch MOQ 200 \$299.00 Normal Order MOQ 1K \$230.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4T5	115	067	0507	2530	36	D1	0455			
	Series number		26014T51150670507253036D10455										
Application scenarios		Robot chassis, logistics tracks,											
125	4 inch half-diameter 110mm tire width 42 open gear 62 bilateral threaded shaft PU model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 2000 RPM Maximum speed: 4000 RPM Maximum torque: 6.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$440.00 Small Batch MOQ 200 \$286.00 Normal Order MOQ 1K \$220.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4T5	115	067	0507	2530	36	S1	0456			
	Series number		26014T51150670507253036S10456										
Application scenarios		Skateboards, robot trolleys, logistics tracks, luggage suitcases, ball machines											
130	4-inch and a half diameter 115mm tire width 62 opening gear 94 internal deceleration conventional model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 16.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$640.00 Small Batch MOQ 200 \$416.00 Normal Order MOQ 1K \$320.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	4H5	115	080	0507	3025	24	S1	0458			
	Series number		26014H51150800507302524S10458										
Application scenarios		Skateboard, robot trolley, logistics track, heavy-duty cart											

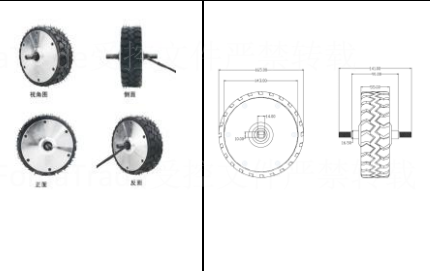
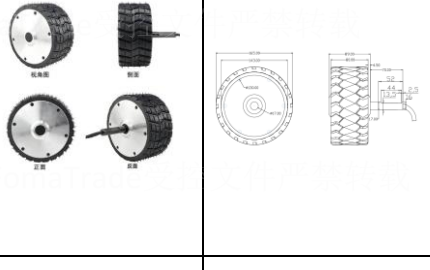
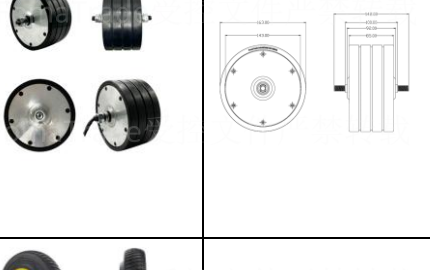
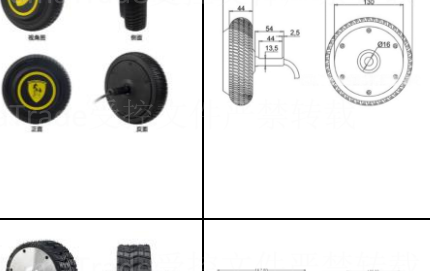
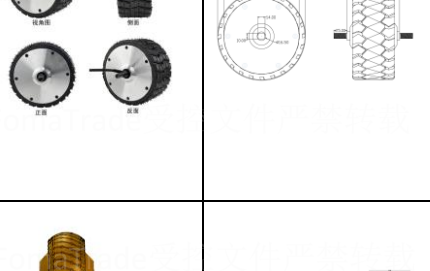
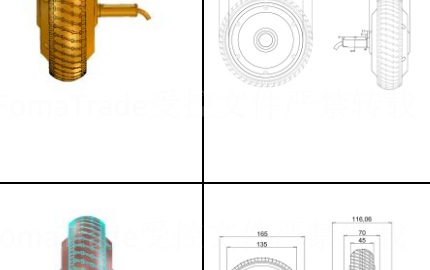

135	4-inch half-diameter 115mm tire width 64 opening gear 94 toothed reduction electric forklift model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 23.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	4H5	115	060	0507	3025	24	S1	0459				Spot retail Leftover stock	\$1,300.00
	Series number			26014H5115060507302524S10459										Small Batch MOQ 200	\$845.00
Application scenarios			Skateboards, robot trolleys, logistics tracks, forklifts							Normal Order MOQ 1K	\$650.00				
140	5-inch diameter 130mm tire width 39 single-sided threaded shaft regular model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 90 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	5D0	130	067	0408	3030	24	D1	0501				Spot retail Leftover stock	\$370.00
	Series number			26015D01300670408303024D10501										Small Batch MOQ 200	\$240.50
Application scenarios			Robot trolley, logistics track,							Normal Order MOQ 1K	\$185.00				
145	5-inch diameter 130mm tire width 39 opening 68 bilateral thread low-speed model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 400 RPM Maximum speed: 600 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	5T0	130	70	0408	3030	24	S1	0504				Spot retail Leftover stock	\$370.00
	Series number			26015T0130700408303024S10504										Small Batch MOQ 200	\$240.50
Application scenarios			Skateboards, robot trolleys, logistics tracks, luggage, bumper cars							Normal Order MOQ 1K	\$185.00				
150	5-inch diameter 128mm tire width 39 opening gear 68 bilateral threaded shaft PU flat tire model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	24	14	5T0	128	067	0408	3030	24	S1	0506				Spot retail Leftover stock	\$490.00
	Series number			24145T01280670408303024S10506										Small Batch MOQ 200	\$318.50
Application scenarios			Skateboards, robot trolleys, logistics tracks, luggage, bumper cars							Normal Order MOQ 1K	\$245.00				
155	5-inch diameter 130mm tire width 30 opening 50 twin axle threaded plastic model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 150 W Maximum power: 200 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 4.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	5T0	130	068	0408	2025	24	S1	0508				Spot retail Leftover stock	\$270.00
	Series number			26015T01300680408202524S10508										Small Batch MOQ 200	\$175.50
Application scenarios			Skateboard, robot trolley, logistics track, luggage,							Normal Order MOQ 1K	\$135.00				
160	5-inch half-diameter 138mm tire width 39 single-sided threaded shaft regular model												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	5D5	138	070	0408	3030	24	D1	0551				Spot retail Leftover stock	\$310.00
	Series number			26015D51380700408303024D10551										Small Batch MOQ 200	\$201.50
Application scenarios			Robot trolley, logistics track,							Normal Order MOQ 1K	\$155.00				
165	5 inch and a half 1024 magnetic encoded motor 140mm tire 29 single side threaded shaft												Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL+Encoder Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	24	12	5D5	140	070	0408	2530	24	D1	0551				Spot retail Leftover stock	\$720.00
	Series number			24125D51400700408253024D10551										Small Batch MOQ 200	\$468.00
Application scenarios			Robot trolley, logistics track							Normal Order MOQ 1K	\$360.00				















170	5-inch half-diameter 138mm tire width 39 opening gear 68 bilateral threaded shaft regular model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$340.00 Small Batch MOQ 200 \$221.00 Normal Order MOQ 1K \$170.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5D5	138	080	0408	2530	24	S1	0552			
	Series number		26015D51380800408253024S10552										
Application scenarios		Skateboard, robot trolley, logistics track, luggage.											
175	5 inch half diameter 140mm tire width 29 single-sided flange shaft (bear model)										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$390.00 Small Batch MOQ 200 \$253.50 Normal Order MOQ 1K \$195.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5D5	140	080	0408	2530	36	D4	0553			
	Series number		26015D51400800408253036D40553										
Application scenarios		Robot trolley, logistics track, luggage box.											
180	5-inch half-diameter 140mm tire width 39 opening gear 68 bilateral threaded shaft galloping model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$370.00 Small Batch MOQ 200 \$240.50 Normal Order MOQ 1K \$185.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5T5	140	080	0408	3030	24	S1	0554			
	Series number		26015T51400800408303024S10554										
Application scenarios		Skateboard, robot trolley, logistics track, luggage.											
185	5-inch half-diameter 142mm tire width 38 opening 67 bilateral threaded axle lace model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$350.00 Small Batch MOQ 200 \$227.50 Normal Order MOQ 1K \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5T5	142	070	0408	3030	24	S1	0556			
	Series number		26015T51420700408303024S10556										
Application scenarios		Skateboard, robot trolley, logistics track, luggage.											
190	5 and a half inches 4096 magnetic coded diameter 140mm tire 29 single side thread										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 7.5 N/M Sensor: AHLL-1024 Magnetic Encoding Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$720.00 Small Batch MOQ 200 \$468.00 Normal Order MOQ 1K \$360.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5T5	140	070	0408	3030	24	D1	0559			
	Series number		26015T51400700408303024D10559										
Application scenarios		Robot trolley											
195	5-inch half-diameter 140mm tire width 121 opening 147 bilateral threaded E-wheel model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 350 W Maximum power: 500 W Rated speed: 300 RPM Maximum speed: 800 RPM Maximum torque: 29.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$1,300.00 Small Batch MOQ 200 \$845.00 Normal Order MOQ 1K \$650.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5T5	140	080	0408	5030	48	S1	0558			
	Series number		26015T51400800408503048S10558										
Application scenarios		Skateboard, robot trolley, logistics track.											
200	5-inch half-diameter 140mm tire width 39 opening 68 bilateral threaded shaft low-speed model										 	<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$330.00 Small Batch MOQ 200 \$214.50 Normal Order MOQ 1K \$165.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	5T5	140	080	0408	3030	24	S1	0559			
	Series number		26015T51400800408303024S10559										
Application scenarios		Skateboard, robot trolley, logistics track, luggage.											

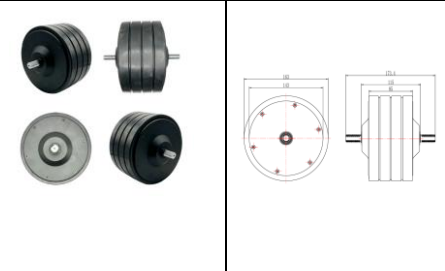
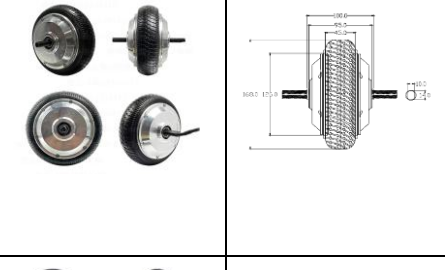

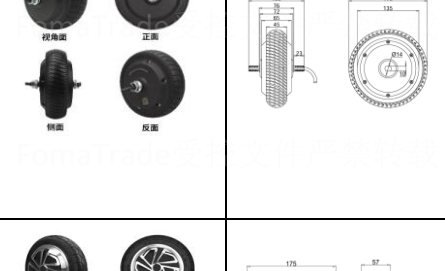

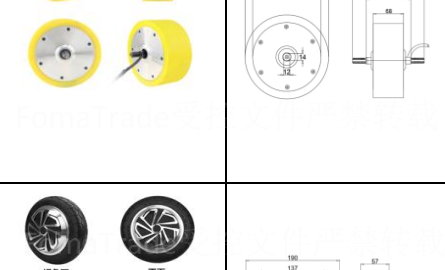

205	5 inch half diameter 140mm tire width 39 opening 68 bilateral threaded shaft PU model												<p>Supported Voltage: 12/24/36/48 Rated voltage: 24 V Rated power: 200 W Maximum power: 300 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	5T5	140	080	0408	3030	24	S1	0552				Spot retail Leftover stock	\$520.00
	Series number			26015T51400800408303024S10552										Small Batch MOQ 200	\$338.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage.							Normal Order MOQ 1K	\$260.00				
210	6-inch diameter 152mm tire width 39 single-sided threaded shaft regular model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6D0	152	099	0512	3030	24	D1	0601				Spot retail Leftover stock	\$390.00
	Series number			26016D01520990512303024D10601										Small Batch MOQ 200	\$253.50
Application scenarios			Robot trolley, logistics track							Normal Order MOQ 1K	\$195.00				
215	6-inch diameter 152mm tire width 45 single-sided finale cyclone model												<p>Supported Voltage: 24/36/48/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 8.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6D0	152	099	0315	2525	24	D1	0607				Spot retail Leftover stock	\$290.00
	Series number			26016D01520990315252524D10607										Small Batch MOQ 200	\$188.50
Application scenarios			hoverboards, robot trolleys, logistics tracks.							Normal Order MOQ 1K	\$145.00				
220	6-inch diameter 152mm tire width 39 opening gear 68 bilateral threaded shaft regular model												<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6D0	152	099	0508	2530	24	S1	0602				Spot retail Leftover stock	\$270.00
	Series number			26016D01520990508253024S10602										Small Batch MOQ 200	\$175.50
Application scenarios			Skateboard, robot trolley, logistics track.							Normal Order MOQ 1K	\$135.00				
225	6-inch diameter 150mm tire width 45 single-sided threaded shaft PU water guide model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 23.2 N/M Sensor: AHLL+Encoding Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6T0	150	105	0420	3530	36	D1	0603				Spot retail Leftover stock	\$760.00
	Series number			26016T01501050420353036D10603										Small Batch MOQ 200	\$494.00
Application scenarios			Robot trolley, logistics track							Normal Order MOQ 1K	\$380.00				
230	6 inch diameter 150mm tire width 45 opening 85 bilateral threaded shaft PU water guide channel												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 21.1 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6T0	150	105	0420	3530	36	S1	0604				Spot retail Leftover stock	\$640.00
	Series number			26016T01501050420353036S10604										Small Batch MOQ 200	\$416.00
Application scenarios			Skateboard, robot trolley, logistics track.							Normal Order MOQ 1K	\$320.00				
235	6 inch diameter 150mm tire width 45 open gear 191 extended shaft PU water guide groove ball throwing machine special supply												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 1800 RPM Maximum speed: 3000 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	6T0	150	105	1205	3030	36	S1	0606				Spot retail Leftover stock	\$570.00
	Series number			26016T01501051205303036S10606										Small Batch MOQ 200	\$370.50
Application scenarios			Ball machine							Normal Order MOQ 1K	\$285.00				

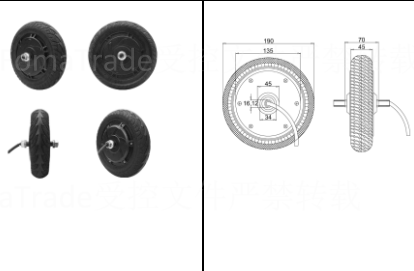
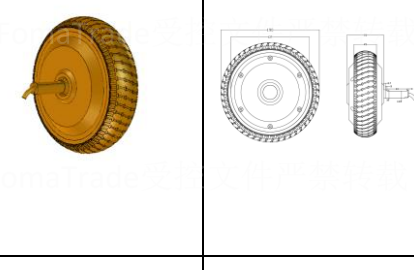
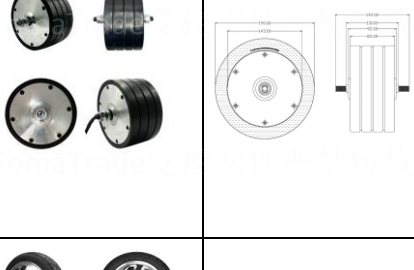
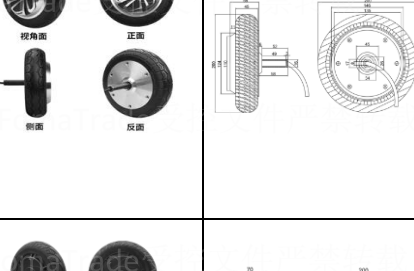
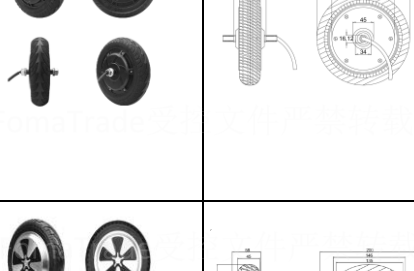
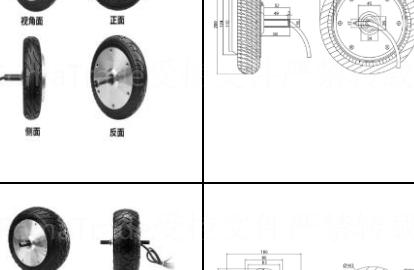
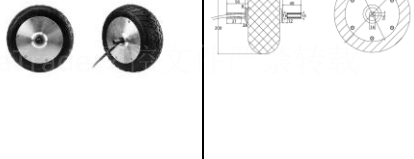
240	6-inch diameter 155mm tire width 55 opening gear 110 bilateral threaded shaft deceleration conventional model										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 24.3 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$640.00 Small Batch MOQ 200 \$416.00 Normal Order MOQ 1K \$320.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T0	155	105	1205	3030	36	S1	0607			
	Series number		26016T01551051205303036510607										
Application scenarios		AGV robot, flatbed cart, logistics trolley											
245	6-inch diameter 155mm tire width 57 opening gear 110 bilateral thread internal reduction PU model										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 24.3 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 160 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$720.00 Small Batch MOQ 200 \$468.00 Normal Order MOQ 1K \$360.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	24	19	6T0	155	105	1205	3030	36	S1	0608			
	Series number		24196T01551051205303036510608										
Application scenarios		AGV robot, flatbed cart, logistics trolley											
250	6-inch half-diameter 165mm tire width 45 single-sided finale plum blossom model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$330.00 Small Batch MOQ 200 \$214.50 Normal Order MOQ 1K \$165.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6D5	165	105	0512	3030	36	D1	0651			
	Series number		26016D51651050512303036D10651										
Application scenarios		Robot chassis, rail cars, flatbed carts, logistics trolleys. Sprinkler truck, balance bike											
255	6-inch half-diameter 168mm tire width 45 opening gear 76 bilateral threaded axle regular model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$340.00 Small Batch MOQ 200 \$221.00 Normal Order MOQ 1K \$170.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6D5	168	105	0512	3030	36	S1	0652			
	Series number		26016D51681050512303036D10652										
Application scenarios		Skateboards, robot trolleys, logistics tracks, scooters											
260	6 1/2 diameter 165mm tire width 45 single end shaft plum star style										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$350.00 Small Batch MOQ 200 \$227.50 Normal Order MOQ 1K \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6D5	165	105	0512	3030	36	D1	0653			
	Series number		26016D51651050512303036D10653										
Application scenarios		Robot chassis, rail cars, flatbed carts, logistics trolleys. Sprinkler truck, balance bike											
265	6-inch half-diameter 172mm tire width 45 opening gear 76 bilateral threaded shaft low-speed model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 23.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$530.00 Small Batch MOQ 200 \$344.50 Normal Order MOQ 1K \$265.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6D5	172	105	0421	3530	48	S1	0654			
	Series number		26016D51721050421353048S10654										
Application scenarios		Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts											
270	6-inch half-diameter 165mm tire width 45 unilateral finale Mercedes-Benz model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00 None-spot As-is production \$4,999.00 Spot retail Leftover stock \$350.00 Small Batch MOQ 200 \$227.50 Normal Order MOQ 1K \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6D5	165	105	0512	3030	36	D1	0655			
	Series number		26016D51651050512303036D10655										
Application scenarios		Robot chassis, rail cars, flatbed carts, logistics trolleys. Sprinkler truck, balance bike											















275	6-inch half-diameter 165mm tire width 68 open gear 100 bilateral threaded shaft PU flat tire model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 23.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6T5	165	105	0421	3530	48	S1	0656			Spot retail Leftover stock	\$660.00
	Series number			26016T51651050421353048S10656									Small Batch MOQ 200	\$429.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$330.00			
280	6-inch half-diameter 168mm tire width 45 single-sided final whirlwind model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6D5	168	105	0512	3030	36	D1	0657			Spot retail Leftover stock	\$350.00
	Series number			26016D51681050512303036D10657									Small Batch MOQ 200	\$227.50
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, sprinklers, hoverboards							Normal Order MOQ 1K	\$175.00			
285	6-inch half-diameter 165mm tire width 45 opening gear 110 bilateral threaded shaft deceleration PU model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4.33 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6D5	165	105	0512	3030	36	D1	0658			Spot retail Leftover stock	\$690.00
	Series number			26016D51651050512303036D10658									Small Batch MOQ 200	\$448.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$345.00			
290	6-inch half-diameter 165mm tire width 80 opening gear 110 bilateral threaded shaft reduction wide flat tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 52.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 5 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6D5	165	105	0512	3030	36	D1	0659			Spot retail Leftover stock	\$920.00
	Series number			26016D51651050512303036D10659									Small Batch MOQ 200	\$598.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$460.00			
295	6-inch half-diameter 169mm tire width 80 opening 105 bilateral finale double tire model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6T5	169	105	0420	4530	48	S1	0658			Spot retail Leftover stock	\$660.00
	Series number			26016T51691050420453048S10658									Small Batch MOQ 200	\$429.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$330.00			
300	6-inch half-diameter 167mm tire width 55 single-sided final flat tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 19.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6T5	167	105	0421	3030	48	D1	0659			Spot retail Leftover stock	\$390.00
	Series number			26016T51671050421303048D10659									Small Batch MOQ 200	\$253.50
Application scenarios			Robot chassis, rail cars, flatbed carts, logistics trolleys. Sprinkler truck, balance bike							Normal Order MOQ 1K	\$195.00			
305	6-inch and a half diameter 165mm tire width 58 single-sided threaded shaft PU flat tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 400 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 23.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6T5	165	105	0421	3530	48	D1	065A			Spot retail Leftover stock	\$840.00
	Series number			26016T51651050421353048D1065A									Small Batch MOQ 200	\$546.00
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, sprinklers, hoverboards							Normal Order MOQ 1K	\$420.00			















310	6-inch half-diameter 165mm tire width 55 opening gear 90 bilateral threaded axle flat tire											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 20.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	165	105	0420	3530	48	S1	065B			Spot retail Leftover stock	¥420.00
	Series number			26016T51651050420353048S1065B									Small Batch MOQ 200	¥273.00
Application scenarios			Robot chassis, rail cars, flatbed carts, logistics trolleys, sprinkler truck,							Normal Order MOQ 1K	¥210.00			
315	6-inch half-diameter 165mm tire width 80 single-sided final flat tire											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 36.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	165	105	0420	5030	48	D1	065C			Spot retail Leftover stock	¥760.00
	Series number			26016T51651050420503048D1065C									Small Batch MOQ 200	¥494.00
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards							Normal Order MOQ 1K	¥380.00			
320	6 inch and a half diameter 163mm tire width 85 open gear 100 bilateral threaded shaft PU water guide channel											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 36.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	163	105	0421	6030	48	S1	065D			Spot retail Leftover stock	¥780.00
	Series number			26016T51631050421603048S1065D									Small Batch MOQ 200	¥507.00
Application scenarios			Robot trolleys, logistics carts, scooters, Flatbed carts, bumper carts							Normal Order MOQ 1K	¥390.00			
325	6-inch half-diameter 164mm tire width 44 single-sided final plastic wheels											<p>Supported Voltage: 12/24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 450 RPM Maximum speed: 650 RPM Maximum torque: 10.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 80 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6D5	164	105	0512	2030	36	D1	065E			Spot retail Leftover stock	¥210.00
	Series number			26016D51641050512203036D1065E									Small Batch MOQ 200	¥136.50
Application scenarios			Robot chassis, rail cars, flatbed carts, logistics trolleys, Sprinkler truck, balance bike							Normal Order MOQ 1K	¥105.00			
330	6-inch half-diameter 167mm tire width 80 opening gear 115 thick double-sided threaded axle flat tire model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 36.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	167	105	0420	5030	48	S1	065F			Spot retail Leftover stock	¥720.00
	Series number			26016T51671050420503048S1065F									Small Batch MOQ 200	¥468.00
Application scenarios			Robot trolleys, logistics carts, scooters, Flatbed carts, bumper carts							Normal Order MOQ 1K	¥360.00			
335	6-inch half-diameter 165mm tire width 45 single-sided D-shaped finale encoder model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 20.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	165	105	0420	3530	36	D1	065G			Spot retail Leftover stock	¥530.00
	Series number			26016T51651050420353036D1065G									Small Batch MOQ 200	¥344.50
Application scenarios			Robot chassis, rail cars, flatbed carts, logistics trolleys, Sprinkler truck, balance bike							Normal Order MOQ 1K	¥265.00			
340	6-inch half-diameter 165mm tire width 45 opening gear 76 bilateral threaded shaft plastic model											<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 700 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	6T5	165	105	0420	2530	36	S1	065H			Spot retail Leftover stock	¥310.00
	Series number			26016T51651050420253036S1065H									Small Batch MOQ 200	¥201.50
Application scenarios			Robot trolleys, logistics carts, scooters, Flatbed carts, bumper carts							Normal Order MOQ 1K	¥155.00			















345	6-inch half-diameter 172mm tire width 45 single-sided threaded shaft modified encoder model										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 20.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$730.00</p> <p>Small Batch MOQ 200 \$474.50</p> <p>Normal Order MOQ 1K \$365.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	172	105	0420	3530	36	D1	065I			
	Series number		26016T51721050420353036D1065I										
Application scenarios		Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards											
350	6 inch half diameter 165mm tire width 100 opening 115 double side thread axle camper special model (1)										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 14.3 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$330.00</p> <p>Small Batch MOQ 200 \$214.50</p> <p>Normal Order MOQ 1K \$165.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	165	105	0421	3025	24	S1	065J			
	Series number		26016T51651050421302524S1065J										
Application scenarios		Campervans, campers, pet cars, children's cars											
355	6 inch half diameter 165mm tire width 100 opening 115 double side thread axle camper special model (1)										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 12.3 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$350.00</p> <p>Small Batch MOQ 200 \$227.50</p> <p>Normal Order MOQ 1K \$175.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	165	105	0421	2525	24	S1	065J			
	Series number		26016T51651050421252524S1065J										
Application scenarios		Campervans, campers, pet cars, children's cars											
360	6 inch half diameter 165mm tire width 100 opening 115 bilateral threaded axle camper special model (2)										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 14.3 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$370.00</p> <p>Small Batch MOQ 200 \$240.50</p> <p>Normal Order MOQ 1K \$185.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	165	105	0420	3030	36	S1	065J			
	Series number		26016T51651050420303036S1065J										
Application scenarios		Campervans, campers, pet cars, children's cars											
365	6 inch and a half diameter xxx width 54 single side key pin stroller is exclusively for regular models										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$570.00</p> <p>Small Batch MOQ 200 \$370.50</p> <p>Normal Order MOQ 1K \$285.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	xxx	105	0420	2530	24	D1	065K			
	Series number		26016T5xxx1050420253024D1065K										
Application scenarios		Baby stroller, golf bag carrier											
370	6-inch half-diameter 163mm tire width 85 opening gear 100 bilateral threaded shaft internal brake model airport luggage car										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 20.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$35,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$840.00</p> <p>Small Batch MOQ 200 \$546.00</p> <p>Normal Order MOQ 1K \$420.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	163	105	0420	3530	36	S1	065L			
	Series number		26016T51631050420353036S1065L										
Application scenarios		Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts											
375	6 inch and a half diameter xxx width 54mm single side key pin baby stroller code										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	<p>Non-standard custom \$15,000.00</p> <p>None-spot As-is production \$4,999.00</p> <p>Spot retail Leftover stock \$530.00</p> <p>Small Batch MOQ 200 \$344.50</p> <p>Normal Order MOQ 1K \$265.00</p>
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			
	26	01	6T5	xxx	105	0420	2030	24	D1	065M			
	Series number		26016T5xxx1050420203024D1065M										
Application scenarios		Skateboard, robot trolley, logistics track, luggage.											

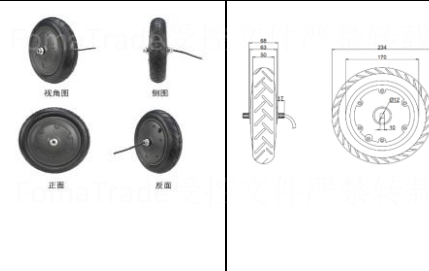
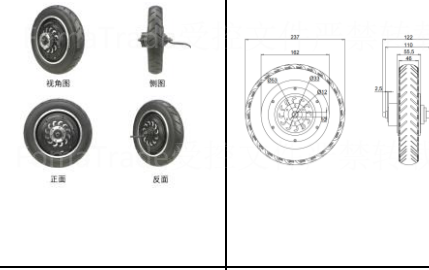
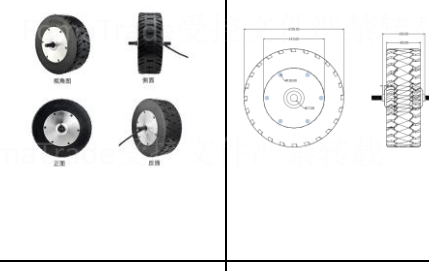
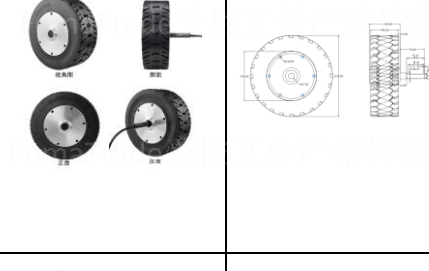
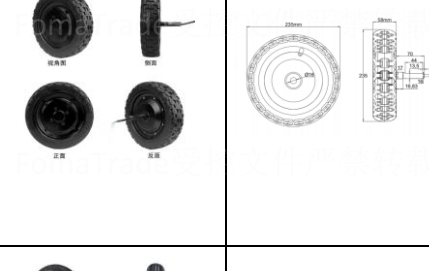
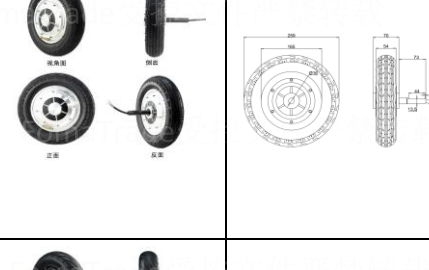

380	6-inch half-diameter 163mm tire width 85 opening gear 110 bilateral threaded shaft deceleration model											<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 500 W Maximum power: 800 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 80.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 4 Maximum load: 300 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6T5	163	105	0420	3030	36	S1	065N			Spot retail Leftover stock	\$900.00
	Series number			26016T5163105042030303651065N									Small Batch MOQ 200	\$585.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$450.00			
385	6-inch half-diameter 165mm tire width 45 open gear 100 bilateral thread internal reduction PU model											<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 29.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 4.33 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	6D5	165	105	0512	3030	36	D1	0658			Spot retail Leftover stock	\$660.00
	Series number			26016D51651050512303036D10658									Small Batch MOQ 200	\$429.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$330.00			
390	7-inch diameter 175mm tire width 45 single-sided finale plum blossom model											<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7D0	175	105	0512	3030	36	D1	0701			Spot retail Leftover stock	\$350.00
	Series number			26017D01751050512303036D10701									Small Batch MOQ 200	\$227.50
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards							Normal Order MOQ 1K	\$175.00			
395	7-inch diameter 172mm tire width 45 opening gear 76 bilateral threaded shaft regular model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 19.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7D0	172	105	0512	3530	36	S1	0702			Spot retail Leftover stock	\$470.00
	Series number			26017D01721050512353036S10702									Small Batch MOQ 200	\$305.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$235.00			
400	7-inch diameter, 175mm tire width, 45 single-sided finale cyclone model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	24	34	7D0	175	105	0512	3030	36	D1	0703			Spot retail Leftover stock	\$350.00
	Series number			24347D01751050512303036D10703									Small Batch MOQ 200	\$227.50
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards							Normal Order MOQ 1K	\$175.00			
405	7 inch diameter 165mm tire width 68 opening 100 bilateral threaded shaft PU flat tire model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 23.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7T0	165	105	0420	3530	48	S1	0704			Spot retail Leftover stock	\$520.00
	Series number			26017T01651050420353048S10704									Small Batch MOQ 200	\$338.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$260.00			
410	7-inch half-diameter 190mm tire width 45 single-sided final whirlwind model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7D5	190	105	0512	3030	36	D1	0751			Spot retail Leftover stock	\$350.00
	Series number			26017D51901050512303036D10751									Small Batch MOQ 200	\$227.50
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards							Normal Order MOQ 1K	\$175.00			















415	7 inch half-diameter 190mm tire width 45 open gear 70 bilateral threaded shaft regular model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7D5	190	105	0512	2530	36	S1	0752			Spot retail Leftover stock	\$330.00
	Series number			26017D51901050512253036510752									Small Batch MOQ 200	\$214.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$165.00			
420	7-inch half-diameter 190mm tire width 45 single-sided finale regular model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 19.2 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7D5	190	105	0420	3030	36	D1	0753			Spot retail Leftover stock	\$420.00
	Series number			26017T51901050420303036D10753									Small Batch MOQ 200	\$273.00
Application scenarios			Robot chassis, track vehicle, flatbed cart, logistics trolley, Sprinklers, hoverboards							Normal Order MOQ 1K	\$210.00			
425	7 inch half diameter 190mm tire width 85 open gear 100 bilateral threaded shaft PU water channel model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 500 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	7T5	190	105	0420	5030	48	S1	0754			Spot retail Leftover stock	\$840.00
	Series number			26017T51901050420503048S10754									Small Batch MOQ 200	\$546.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$420.00			
430	8-inch diameter 200mm tire width 45 single-sided finale whirlwind model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8D0	200	105	0512	3030	36	D1	0801			Spot retail Leftover stock	\$370.00
	Series number			26018D02001050512303036D10801									Small Batch MOQ 200	\$240.50
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, mobility scooters							Normal Order MOQ 1K	\$185.00			
435	8-inch diameter 200mm tire width 45 opening gear 70 bilateral threaded shaft											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8D0	200	105	0512	3030	36	S1	0802			Spot retail Leftover stock	\$350.00
	Series number			26018D02001050512303036S10802									Small Batch MOQ 200	\$227.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$175.00			
440	8" diameter 200mm tire width 45 single axle Plum Star model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.6 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8D0	200	105	0512	3030	36	D1	0803			Spot retail Leftover stock	\$370.00
	Series number			26018D02001050512303036D10803									Small Batch MOQ 200	\$240.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	\$185.00			
445	8-inch diameter 200mm tire width 83 opening 100 bilateral threaded shaft											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 400 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8H0	200	105	0420	4503	36	S1	0804			Spot retail Leftover stock	\$770.00
	Series number			26018H02001050420450336S10804									Small Batch MOQ 200	\$500.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$385.00			















450	8-inch diameter 200mm tire width 45 single-sided final plastic model												<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Maximum speed: 400 RPM Maximum torque: 10.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 85 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8D0	200	105	0512	2525	36	D1	0805				Spot retail Leftover stock	¥250.00
	Series number			26018D02001050512252536D10805										Small Batch MOQ 200	¥162.50
Application scenarios			Skateboard, robot trolley, logistics track, luggage.							Normal Order MOQ 1K	¥125.00				
455	8-inch diameter 200mm tire width 68 open gear 100 bilateral threaded shaft PU flat tire												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8T0	200	105	0420	4503	36	S1	0806				Spot retail Leftover stock	¥710.00
	Series number			26018T02001050420450336S10806										Small Batch MOQ 200	¥461.50
Application scenarios			Skateboard, robot trolley, logistics track, luggage.							Normal Order MOQ 1K	¥355.00				
460	8 inch diameter 200mm tire width 84 side end shaft conventional type												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8H0	200	105	0512	3030	36	D1	0807				Spot retail Leftover stock	¥530.00
	Series number			26018H02001050512303036D10807										Small Batch MOQ 200	¥344.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥265.00				
465	8-inch diameter 200mm tire width 45 open gear 66 bilateral threaded shaft inflatable model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8D0	200	105	0512	3030	36	S1	0808				Spot retail Leftover stock	¥390.00
	Series number			26018D02001050512303036S10808										Small Batch MOQ 200	¥253.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥195.00				
470	8-inch diameter 200mm tire width 83 single-sided finale disc brake model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8H0	200	105	0512	3030	36	D1	0809				Spot retail Leftover stock	¥590.00
	Series number			26018H02001050512303036D10809										Small Batch MOQ 200	¥383.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥295.00				
475	8-inch diameter 200mm tire width 83 single-sided final long sleeve model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8H0	200	105	0512	3030	36	D1	080A				Spot retail Leftover stock	¥590.00
	Series number			26018H02001050512303036D1080A										Small Batch MOQ 200	¥383.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥295.00				
480	8 inch double side threaded shaft electric skateboard motor												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 400 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	¥4,999.00
	26	01	8H0	200	105	0512	3030	36	D1	080A				Spot retail Leftover stock	¥470.00
	Series number			26018H02001050512303036D1080A										Small Batch MOQ 200	¥305.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥235.00				

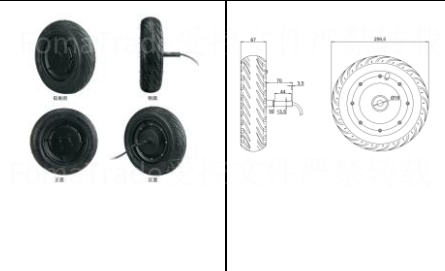
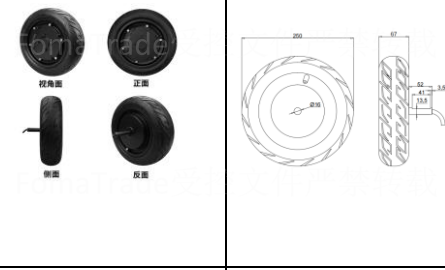
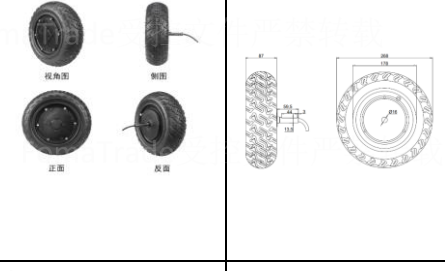
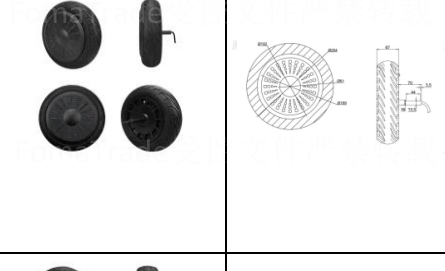
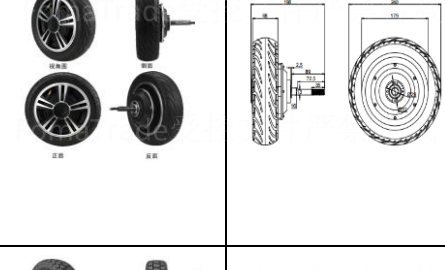
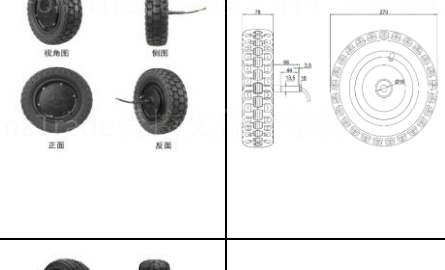

485	8 inch diameter 200mm tire width 85 opening 100 bilateral threaded shaft water guide channel customized model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8T0	200	105	0420	4503	48	S1	080B			Spot retail Leftover stock	\$640.00
	Series number			26018T0200105042045034851080B									Small Batch MOQ 200	\$416.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage.							Normal Order MOQ 1K	\$320.00			
490	8-inch diameter 200mm tire width 80 single-sided final flat tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$15,000.00
	26	01	8H0	200	105	0512	6030	36	D1	080C			Spot retail Leftover stock	\$920.00
	Series number			26018H02001050512603036D1080C									Small Batch MOQ 200	\$598.00
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, drift cars							Normal Order MOQ 1K	\$460.00			
495	8-inch diameter 200mm tire width 83 opening gear 110 bilateral thread reduction model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 450 W Maximum power: 550 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 52.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 250 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8D0	200	105	0420	3530	36	S1	080D			Spot retail Leftover stock	\$900.00
	Series number			26018D02001050420353036S1080D									Small Batch MOQ 200	\$585.00
Application scenarios			8-inch diameter 200mm tire width 83 opening gear 110 bilateral thread reduction model							Normal Order MOQ 1K	\$450.00			
500	8-inch diameter 200mm tire width 61 single-sided pressing flat tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 300 RPM Maximum speed: 800 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8T0	200	105	0420	3030	36	D1	080E			Spot retail Leftover stock	\$580.00
	Series number			26018T02001050420303036D1080E									Small Batch MOQ 200	\$377.00
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, drift cars							Normal Order MOQ 1K	\$290.00			
505	8 inch diameter 200mm tire width 44 open gear 65 bilateral internal and external thread shaft										 	<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 200 W Maximum power: 300 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8T0	200	105	0420	4503	36	D1	080H			Spot retail Leftover stock	\$290.00
	Series number			26018T02001050420450336D1080H									Small Batch MOQ 200	\$188.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$145.00			
510	8-inch diameter 200mm tire width 83 opening gear 140 bilateral thread reduction model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake+ Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8H0	200	105	0420	4503	36	S2	080F			Spot retail Leftover stock	\$720.00
	Series number			26018H02001050420450336S2080F									Small Batch MOQ 200	\$468.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$360.00			
515	8-inch half-diameter 213mm tire width 84 single-sided finale 55 short axle model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 800 RPM Maximum speed: 1000 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	8H5	213	115	0611	3530	36	D1	0851			Spot retail Leftover stock	\$690.00
	Series number			26018H52131150611353036D10851									Small Batch MOQ 200	\$448.50
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, drift cars							Normal Order MOQ 1K	\$345.00			

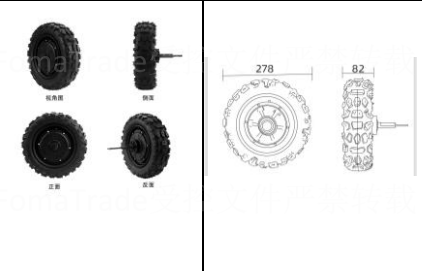
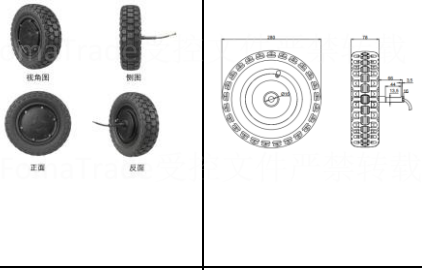
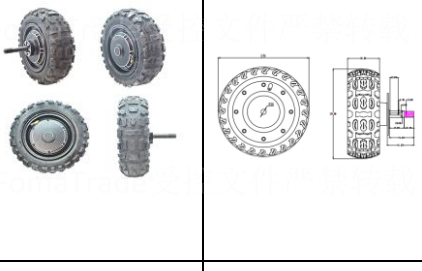
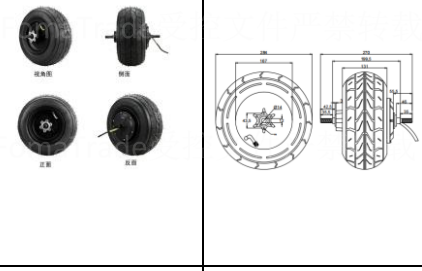
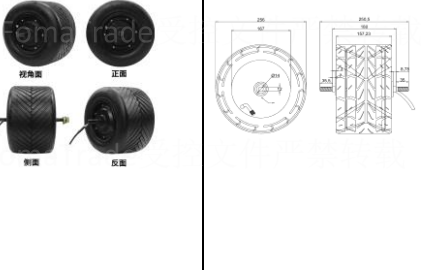

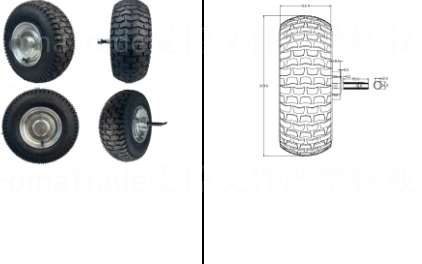
520	8-inch half-diameter 213mm tire width 84 opening 100 bilateral threaded shaft regular model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 500 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8H5	213	115	0420	3503	48	S1	0852				Spot retail Leftover stock	\$760.00
	Series number			26018H52131150420350348510852										Small Batch MOQ 200	\$494.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$380.00				
525	8-inch half-diameter 213mm tire width 83 unilateral final 82 long axle model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8H5	213	105	0512	3030	36	D1	0853				Spot retail Leftover stock	\$590.00
	Series number			26018H52131050512303036D10853										Small Batch MOQ 200	\$383.50
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, drift cars							Normal Order MOQ 1K	\$295.00				
530	8-inch half-diameter 213mm tire width 83 opening gear 120 double-sided thread Disc brake model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8H5	213	105	0420	4503	48	S2	0854				Spot retail Leftover stock	\$730.00
	Series number			26018H52131050420450348520854										Small Batch MOQ 200	\$474.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$365.00				
535	8-inch half-diameter 213mm tire width 83 single-sided final Disc brake model 55 short axle												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 900 RPM Maximum speed: 1200 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8H5	213	105	0610	3530	36	D1	0855				Spot retail Leftover stock	\$640.00
	Series number			26018H52131050610353036D10855										Small Batch MOQ 200	\$416.00
Application scenarios			Robot chassis, track vehicle, logistics trolley. Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	\$320.00				
540	8-inch half-diameter 210mm tire width 83 opening 100 bilateral thread model customized 400 kg												<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 350 W Maximum power: 450 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8H5	210	105	0420	60	48	S1	0856				Spot retail Leftover stock	\$690.00
	Series number			26018H521010504206048510856										Small Batch MOQ 200	\$448.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$345.00				
545	8-inch half-diameter 215mm tire width 50mm open gear 60mm double-threaded honeycomb model (stroke)												<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	8D5	215	105	0415	2525	36	S1	0852				Spot retail Leftover stock	\$350.00
	Series number			26018D52151050415252536S10852										Small Batch MOQ 200	\$227.50
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$175.00				
550	9-inch diameter 222mm tire width 50 single-sided threaded shaft												<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	9H0	222	105	0512	3030	36	D1	0901				Spot retail Leftover stock	\$570.00
	Series number			26019H02221050512303036D10901										Small Batch MOQ 200	\$370.50
Application scenarios			Skateboard, robot trolley, logistics track, luggage.							Normal Order MOQ 1K	\$285.00				













555	9-inch diameter 234mm, tire width 50, opening gear 63, bilateral threaded shaft regular model											Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	9T0	234	105	0512	2530	36	S1	0902		Spot retail Leftover stock	¥310.00		
	Series number			26019T02341050512253036510902								Small Batch MOQ 200	¥201.50		
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥155.00				
560	9-inch half-diameter 237mm tire width 46 opening 100 bilateral threaded shaft Disc brake model											Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;		Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	9T5	237	105	0512	3003	36	S1	0952		Spot retail Leftover stock	¥370.00		
	Series number			26019T52371050512300336510952								Small Batch MOQ 200	¥240.50		
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥185.00				
565	9 inch half-diameter 235mm tire width 80 open gear 90 bilateral thread customized model											Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	9T5	235	105	0512	3003	36	S1	0953		Spot retail Leftover stock	¥780.00		
	Series number			26019T52351050512300336510953								Small Batch MOQ 200	¥507.00		
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥390.00				
570	9-inch half-diameter 235mm tire width 80 single-axle flat tire											Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 32.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	9T5	235	105	0512	3003	36	S1	0954		Spot retail Leftover stock	¥800.00		
	Series number			26019T52351050512300336510954								Small Batch MOQ 200	¥520.00		
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥400.00				
575	9-inch half-diameter 235mm tire width 58 single axle 30H-20 flat tire											Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 500 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	9T5	235	105	0512	3003	36	S1	0955		Spot retail Leftover stock	¥590.00		
	Series number			26019T52351050512300336510955								Small Batch MOQ 200	¥383.50		
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥295.00				
580	10-inch diameter, 259mm tire width, 54 single-sided finale sunflower regular model											Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 400 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	10D	259	105	0512	3030	36	D1	1001		Spot retail Leftover stock	¥390.00		
	Series number			260110D2591050512303036D11001								Small Batch MOQ 200	¥253.50		
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, drifts							Normal Order MOQ 1K	¥195.00				
585	10-inch diameter 266mm tire width 65 opening 88 bilateral threaded vacuum tires											Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 400 W Maximum power: 500 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;		Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number		None-spot As-is production	¥4,999.00		
	26	01	10D	266	105	0512	2503	36	D1	1006		Spot retail Leftover stock	¥590.00		
	Series number			260110D2661050512250336D11006								Small Batch MOQ 200	¥383.50		
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	¥295.00				

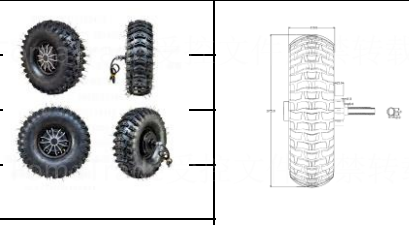

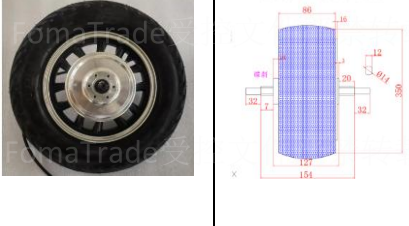
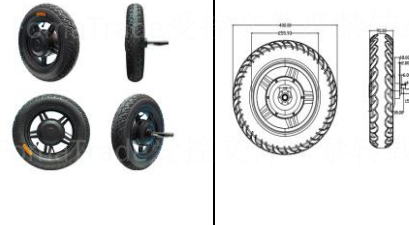
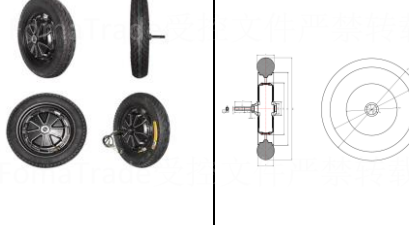
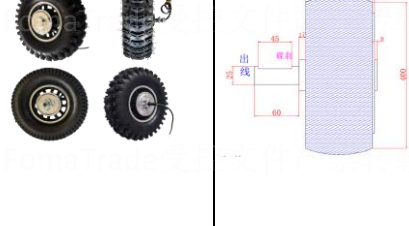
590	10-inch diameter 254mm, tire width 52, opening gear 88, bilateral threaded shaft												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	254	105	0512	2530	24	S1	1002				Spot retail Leftover stock	\$520.00
	Series number			260110D2541050512253024S11002										Small Batch MOQ 200	\$338.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$260.00				
595	10-inch diameter 255mm tire width 54 single-sided finale spider pattern regular model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 400 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	D2	1003				Spot retail Leftover stock	\$370.00
	Series number			260110D2551050512300336D21003										Small Batch MOQ 200	\$240.50
Application scenarios			Robot chassis, track vehicle, logistics trolley. Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$185.00				
600	10 inch diameter 255mm tire width 55 opening gear 88 bilateral threaded shaft												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 650 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 29.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 160 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	S1	1004				Spot retail Leftover stock	\$640.00
	Series number			260110D2551050512300336S11004										Small Batch MOQ 200	\$416.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$320.00				
605	10-inch diameter 255mm tire width 54 single-sided finale disc brake regular model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 400 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake + Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	D1	1005				Spot retail Leftover stock	\$390.00
	Series number			260110D2551050512300336D11005										Small Batch MOQ 200	\$253.50
Application scenarios			Robot chassis, track vehicle, logistics trolley. Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$195.00				
610	10-inch diameter, 266mm width, 65 ply, 88 ply, double-sided thread shaft, vacuum tire model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 650 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 29.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 160 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	266	105	0512	2503	36	S2	1006				Spot retail Leftover stock	\$640.00
	Series number			260110D2661050512250336S21006										Small Batch MOQ 200	\$416.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$320.00				
615	10-inch diameter 254mm tire width 52 unilateral D-shaped finale												<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 7.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	254	105	0512	2503	36	D1	1007				Spot retail Leftover stock	\$270.00
	Series number			260110D2541050512250336D11007										Small Batch MOQ 200	\$175.50
Application scenarios			Robot chassis, track vehicle, logistics trolley. Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$135.00				
620	10-inch diameter 255mm tire width 54 opening 100 bilateral threaded drum brake model												<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake + Drum Brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number				None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	S2	1008				Spot retail Leftover stock	\$520.00
	Series number			260110D2551050512300336S21008										Small Batch MOQ 200	\$338.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	\$260.00				




625	10-inch double-threaded shaft toothed reduction motor										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 200 RPM Maximum speed: 400 RPM Maximum torque: 85.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 5 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	S2	1008					Spot retail Leftover stock	\$1,500.00
	Series number			260110D2551050512300336S21008											Small Batch MOQ 200	\$975.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$750.00					
630	10-inch diameter 250mm tire width 67 single-sided final shaft 105 short shaft model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 500 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 21.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10T	250	115	0518	3003	48	D1	100A					Spot retail Leftover stock	\$790.00
	Series number			260110T2501150518300348D1100A											Small Batch MOQ 200	\$513.50
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, mobility scooters							Normal Order MOQ 1K	\$395.00					
635	10-inch diameter 255mm tire width 54 single-sided finale Drum Brake model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 400 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	255	155	0708	3003	36	D1	1009					Spot retail Leftover stock	\$520.00
	Series number			260110D2551550708300336D11009											Small Batch MOQ 200	\$338.00
Application scenarios			Robot chassis, rail cars, logistics trolleys. Sprinklers, hoverboards, go-karts, mobility scooters							Normal Order MOQ 1K	\$260.00					
640	10-inch diameter 250mm tire width 67 unilateral final 115 long axle go-kart										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 54 V Rated power: 350 W Maximum power: 550 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	255	115	0712	3003	54	D1	1011					Spot retail Leftover stock	\$720.00
	Series number			260110D2551150712300354D11011											Small Batch MOQ 200	\$468.00
Application scenarios			Robot chassis, track vehicle, logistics trolley. Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$360.00					
645	10 inch diameter 255mm tire width 158 opening gear 168 double side threaded shaft Disc brake geared motor										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3030	36	D1	1018					Spot retail Leftover stock	\$840.00
	Series number			260110D255105051230036D11018											Small Batch MOQ 200	\$546.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$420.00					
650	10-inch diameter, 256mm tire width, 157 start, 180 small Harley										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 800 W Rated speed: 500 RPM Maximum speed: 1000 RPM Maximum torque: 42.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	256	105	0512	3003	36	D1	1017					Spot retail Leftover stock	\$1,700.00
	Series number			260110D256105051230036D11017											Small Batch MOQ 200	\$1,105.00
Application scenarios			Robot trolleys, logistics carts, scooters. Flatbed carts, bumper carts							Normal Order MOQ 1K	\$850.00					
655	10-inch single-axle 105-core go-kart Xiaomi model 16-55 axle										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	10D	250	105	0512	3003	36	D1	1016					Spot retail Leftover stock	\$630.00
	Series number			260110D250105051230036D11016											Small Batch MOQ 200	\$409.50
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	\$315.00					

660	10-inch single-sided 105-core Xiaomi model 16-70 axis											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	10D	255	105	0512	3003	36	D1	1015			Spot retail Leftover stock	\$570.00
	Series number			260110D2551050512300336D11015									Small Batch MOQ 200	\$370.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$285.00			
665	10-inch single-side axle 115-core kart Xiaomi model 16-52 axle											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	10D	250	115	0512	3003	36	D1	1014			Spot retail Leftover stock	\$700.00
	Series number			260110D2501150512300336D11014									Small Batch MOQ 200	\$455.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$350.00			
670	10-inch half-diameter 268mm tire width 87 single-sided Dami model											<p>Supported Voltage: 24/36/48 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	105	268	105	0512	3003	36	D1	1051			Spot retail Leftover stock	\$770.00
	Series number			26011052681050512300336D11051									Small Batch MOQ 200	\$500.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$385.00			
675	10-inch diameter 254mm tire width 67 single-sided finale plastic luminous model											<p>Supported Voltage: 24/36/48/54 Rated voltage: 36 V Rated power: 250 W Maximum power: 350 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 12.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 100 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	10D	254	105	0512	3003	36	D1	1012			Spot retail Leftover stock	\$250.00
	Series number			260110D2541050512300336D11012									Small Batch MOQ 200	\$162.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$125.00			
680	10-inch diameter 248mm tire width 68 single-sided threaded shaft toothed reduction model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	10D	248	105	0512	3003	36	D1	1013			Spot retail Leftover stock	\$1,300.00
	Series number			260110D2481050512300336D11013									Small Batch MOQ 200	\$845.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$650.00			
685	A 10-inch half-diameter, 270mm tire width, 78mm single-sided grand Mercedes-Benz											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 14.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	10D	270	105	0512	3003	36	D1	1053			Spot retail Leftover stock	\$860.00
	Series number			260110D2701050512300336D11053									Small Batch MOQ 200	\$559.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$430.00			
690	11-inch diameter, 284mm tire width, 131 single-sided finale Harley model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 800 RPM Maximum speed: 1000 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	\$4,999.00
	26	01	105	270	105	0512	3003	36	S1	1054			Spot retail Leftover stock	\$1,700.00
	Series number			26011052701050512300336S11054									Small Batch MOQ 200	\$1,105.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	\$850.00			

695	11-inch diameter 278mm tire width 82 single-sided finale Disc brake off-road model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 450 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	11D	278	115	0421	3003	36	D1	1101					Spot retail Leftover stock	\$770.00
	Series number			260111D2781150421300336D11101											Small Batch MOQ 200	\$500.50
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$385.00					
700	11-inch, 280mm diameter, 78mm wide single-sided grand Mercedes-Benz											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 350 W Maximum power: 500 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	11D	280	115	0512	3003	36	D1	1103					Spot retail Leftover stock	\$900.00
	Series number			260111D2801150512300336D11103											Small Batch MOQ 200	\$585.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$450.00					
705	11-inch diameter 278mm tire width 98 unilateral threaded axle large off-road model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 800 W Rated speed: 600 RPM Maximum speed: 900 RPM Maximum torque: 29.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 150 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	11D	280	105	0512	3003	36	D1	1103					Spot retail Leftover stock	\$1,100.00
	Series number			260111D2801050512300336D11103											Small Batch MOQ 200	\$715.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$550.00					
710	11-inch diameter, 284mm tire width, 131mm bilateral threaded shaft Harley model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 800 RPM Maximum speed: 1000 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	11D	284	105	0421	5030	36	S1	1102					Spot retail Leftover stock	\$1,600.00
	Series number			260111D2841050421503036S11102											Small Batch MOQ 200	\$1,040.00
Application scenarios			Robot trolleys, logistics carts, scooters, Flatbed carts, bumper carts							Normal Order MOQ 1K	\$800.00					
715	11-inch diameter 284mm tire width 131 bilateral threaded axle flat tire											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 800 RPM Maximum speed: 1000 RPM Maximum torque: 36.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	11D	284	115	0421	6030	36	S1	1104					Spot retail Leftover stock	\$1,720.00
	Series number			260111D2841150421603036S11104											Small Batch MOQ 200	\$1,118.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	\$860.00					
720	12 inch diameter 300mm tire width 72 single-sided grain shaft conventional											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 500 W Rated speed: 400 RPM Maximum speed: 600 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$15,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	12D	300	180	0712	2425	48	D1	1201					Spot retail Leftover stock	\$1,300.00
	Series number			260112D3001800712242548D11201											Small Batch MOQ 200	\$845.00
Application scenarios			Robot chassis, track vehicle, logistics trolley, Sprinklers, hoverboards, go-karts, scooters							Normal Order MOQ 1K	\$650.00					
725	12-inch diameter 300mm tire width 72 opening gear 120 bilateral threaded shaft											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 52.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	\$35,000.00		
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number					None-spot As-is production	\$4,999.00
	26	01	12D	300	180	1207	2420	48	S1	1202					Spot retail Leftover stock	\$1,900.00
	Series number			260112D3001801207242048S11202											Small Batch MOQ 200	\$1,235.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	\$950.00					

730	12-inch diameter 300mm tire width 112 single-sided finale herringbone tire										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 80.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	12D	300	180	1207	2420	48	S1	1202			Spot retail Leftover stock	¥2,300.00
	Series number			260112D3001801207242048S11202									Small Batch MOQ 200	¥1,495.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	¥1,150.00			
735	13-inch diameter 338mm tire width 110 single-sided finale model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 80.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 150 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	13D	338	125	1207	2420	48	S1	1202			Spot retail Leftover stock	¥3,100.00
	Series number			260113D3381251207242048S11202									Small Batch MOQ 200	¥2,015.00
Application scenarios			Skateboard, robot trolley, logistics track, luggage							Normal Order MOQ 1K	¥1,550.00			
740	14 diameter 350mm tire width 112 opening 134 bilateral threaded shaft reduction model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 80.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 5 Maximum load: 150 kg Brake method: electronic brake+Disc brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	350	180	1207	3030	48	S1	1404			Spot retail Leftover stock	¥1,900.00
	Series number			260114D3501801207303048S11404									Small Batch MOQ 200	¥1,235.00
Application scenarios			Robot trolley, logistics track, handcart, Agricultural machinery							Normal Order MOQ 1K	¥950.00			
745	14-inch diameter 360 tire width 77 unilateral final 10 tendons toothed reduction model										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 100.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 5 Maximum load: 250 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	360	180	1207	2403	48	S1	1403			Spot retail Leftover stock	¥2,500.00
	Series number			260114D3601801207240348S11403									Small Batch MOQ 200	¥1,625.00
Application scenarios			Robot cart, logistics track, handcart							Normal Order MOQ 1K	¥1,250.00			
750	14-inch diameter 350mm tire width 78 single-sided H-threaded shaft										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 300 W Maximum power: 500 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 26.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	350	180	1207	2403	48	D1	1401			Spot retail Leftover stock	¥1,500.00
	Series number			260114D3501801207240348D11401									Small Batch MOQ 200	¥975.00
Application scenarios			Robot cart, logistics track, handcart							Normal Order MOQ 1K	¥750.00			
755	15-inch diameter 375 tire width 110 single-sided threaded shaft										 	<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 100.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	375	123	1207	3030	48	S1	1501			Spot retail Leftover stock	¥2,700.00
	Series number			260114D3751231207303048S11501									Small Batch MOQ 200	¥1,755.00
Application scenarios			Robot trolley, logistics track, handcart, Agricultural machinery							Normal Order MOQ 1K	¥1,350.00			

760	15-inch diameter 375 off-road model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 1000 W Rated speed: 500 RPM Maximum speed: 800 RPM Maximum torque: 19.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 1 Maximum load: 180 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	375	123	1207	3030	48	S1	1502			Spot retail Leftover stock	¥1,700.00
	Series number		260114D3751231207303048S11502										Small Batch MOQ 200	¥1,105.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥850.00			
765	15-inch diameter 375 tire width 160 opening 184 bilateral threaded shaft reduction model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 800 W Maximum power: 1500 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 150 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 5 Maximum load: 300 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	14D	375	180	1207	2403	48	S1	1503			Spot retail Leftover stock	¥3,300.00
	Series number		260114D3751801207240348S11503										Small Batch MOQ 200	¥2,145.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥1,650.00			
770	15-inch diameter 350mm tire width 86 bilateral threaded shaft											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 800 W Maximum power: 1500 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 150 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 300 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	15D	350	123	0609	3030	48	S1	1504			Spot retail Leftover stock	¥3,500.00
	Series number		260115D3501230609303048S11504										Small Batch MOQ 200	¥2,275.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥1,750.00			
775	16 inch diameter 400mm tire width 77 single side end shaft 10 bars with tooth deceleration custom model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 800 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 100.5 N/M Sensor: AHLL 120° Pole pairs: 15 pairs Reduction ratio: 1: 4 Maximum load: 250 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥15,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	16D	350	123	1207	3030	48	S1	1602			Spot retail Leftover stock	¥2,500.00
	Series number		260116D3501231207303048S11602										Small Batch MOQ 200	¥1,625.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥1,250.00			
780	16-inch diameter 350mm tire width 78 single-sided threaded shaft											<p>Supported Voltage: 24/36/48/60 Rated voltage: 36 V Rated power: 500 W Maximum power: 500 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 26.5 N/M Sensor: AHLL 120° Pole pairs: 26 pairs Reduction ratio: 1: 1 Maximum load: 120 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	16D	350	178	0712	2403	48	D2	1601			Spot retail Leftover stock	¥1,700.00
	Series number		260116D3501780712240348D21601										Small Batch MOQ 200	¥1,105.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥850.00			
785	16-inch diameter 400mm tire width 120 single-sided thread reduction model											<p>Supported Voltage: 24/36/48/60 Rated voltage: 48 V Rated power: 500 W Maximum power: 1000 W Rated speed: 300 RPM Maximum speed: 600 RPM Maximum torque: 100.5 N/M Sensor: AHLL 120° Pole pairs: 10 pairs Reduction ratio: 1: 4 Maximum load: 200 kg Brake method: electronic brake Waterproof rating: ip55 product weight;</p>	Non-standard custom	¥35,000.00
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00
	26	01	16D	400	178	0712	2403	48	S2	1603			Spot retail Leftover stock	¥3,300.00
	Series number		260116D4001780712240348S21603										Small Batch MOQ 200	¥2,145.00
Application scenarios		Robot trolley, logistics track, handcart. Agricultural machinery								Normal Order MOQ 1K	¥1,650.00			

790	20 inch diameter 510mm tire width 130 open gear 200 bilateral threaded shaft										  	<p>Supported Voltage: 36/48/60/72 Rated voltage: 48 V Rated power: 1000 W Maximum power: 3000 W Rated speed: 600 RPM Maximum speed: 1000 RPM Maximum torque: 32.5 N/M Rated current: 10 A Max current resistance: 30 A Hall Angle: 120 °Pole pairs: 15 pairs Maximum load: 200 kg Brake mode: electromagnetic brake Waterproof rating: ip55</p>	Non-standard custom	¥15,000.00	
	Year of production	Production cycle	Specification model	Tire diameter	Core	Circumvention	Magnet	Rated voltage	Shaft out	Series number			None-spot As-is production	¥4,999.00	
	26	01	20D	500	192	0715	3003	48	S1	2002			Spot retail Leftover stock	¥2,900.00	
	Series number			260120D5001920715300348S12002									Small Batch MOQ 200		¥1,885.00
	Application scenarios			Robot trolley, logistics track, handcart, Agricultural machinery,									Normal Order MOQ 1K		¥1,450.00
<p>Note: This product is fully supported by Shenzhen Jinhaixin Holdings. The above products are for reference only regarding size and shape. The final pricing will be based on the configuration requirements. There are three customization modes for the products: 1. Produce samples separately as per requirements. 2. Produce samples based on the deposit deduction method. 3. Produce samples in accordance with the order model (MOQ 1k).</p>															